



Z5655-BWL1

HET Elongated, Floor Mounted EcoVantage®
Flush Valve Toilet

TAG _____

Architectural/Engineering Specification:

Vitreous China, floor mounted, bottom outlet toilet with siphon jet flushing action and elongated front rim with 1-1/2" spud. This bowl is designed to perform to industry standards with as little as 1.1 gallons per flush.

Product Features:

- Zurn High Efficiency Toilets and paired performance flush valve systems are designed to exceed industry standards, while using as little as 1.1 gallons of water per flush.
- Vitreous china
- Elongated front rim
- 2-1/8" fully glazed trapway
- High efficiency siphon jet flush action
- Shipping Weight: 55 lbs.



Options:

- AM Antimicrobial ceramic glaze

Recommended Trim:

- Z5955SS-EL
Elongated, standard white, open front toilet seat less cover with stainless steel check hinge.
- Z5972-COMB
Closet bolt & wax ring kit.

See Zurn One Systems for suggested packages.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice.
Please contact Zurn for most up to date information.

Compliance and Certification:



- WaterSense Compliant



This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 · Ph. 1-855-ONE-ZURN, Fax 919-775-3541
In Canada: ZURN INDUSTRIES LIMITED 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292

Rev. A Date: 06/04/19 C.N. No. NEW Prod. | Dwg. No. SS Z5655-BWL1

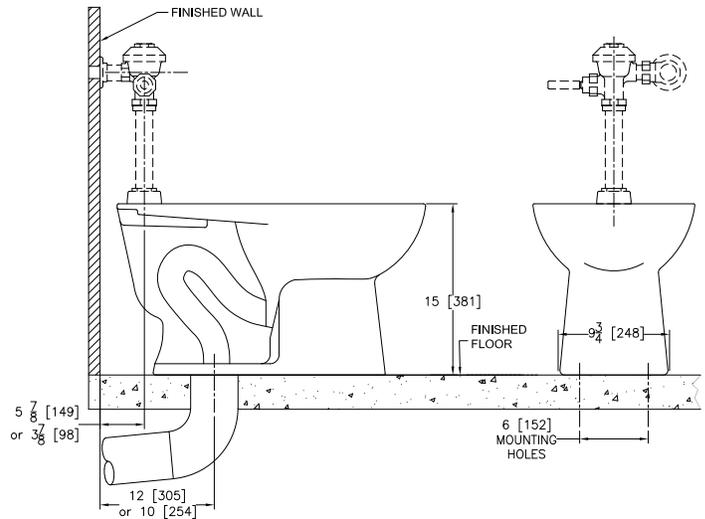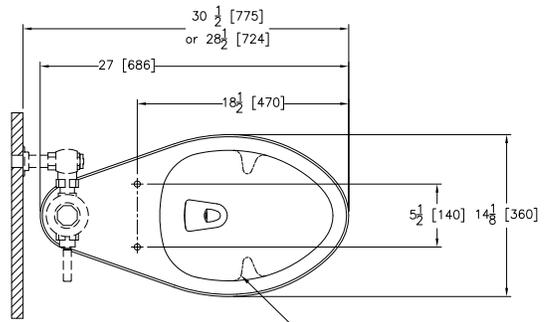

Rough-in/Overview dimensions for Z5655 Series
Z5655-BWL1 with top spud
Z5656-BWL1 with top spud and bedpan lugs

Fixture dimensions meet ASME A112.19.2/CSA B45.1 requirements.
In Canada - Consult local codes and standards.



US 1.855.ONE.ZURN CANADA 1.905.405.8272 ZURN.COM