


Perimeter seals

Adjustable sealing systems – jamb-applied



7770

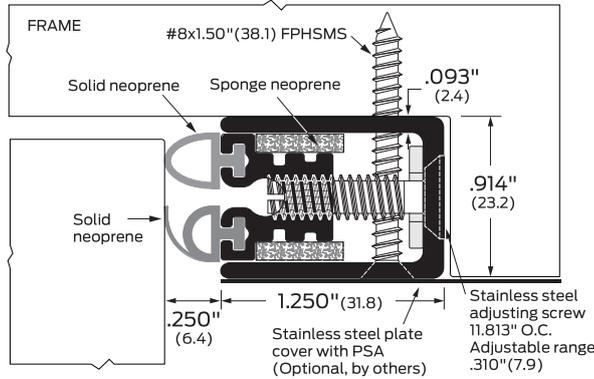


Finishes: AA, BK, D, G Options: S, SEC ANSI/BHMA: 7770AA, 7770BK, 7770D, 7770G R3B264



This model is supplied with mitered corners. Extruded Bulb/Finger for double-sealing protection. 20 minute as a stop, 180 min when applied to stop.

770SP / 770STST

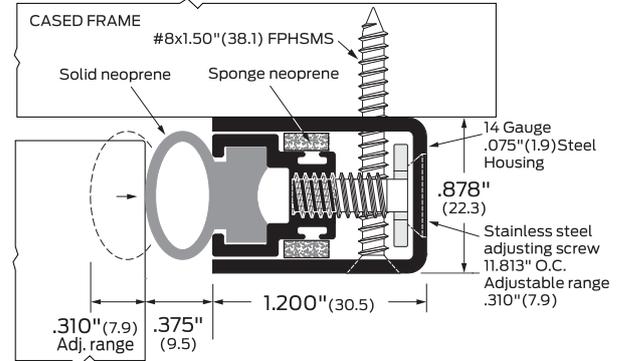


Finishes: SP, STST Options: S, SEC ANSI/BHMA: 770SP, 770STST R0B264 R5B254



This model is supplied with mitered corners. 90 min. fire rating for certified wood and metal doors and frames when applied as a stop. Positive Pressure Listed as a stop for 16 gauge steel cased opening up to 90 minutes on single and pair doors. 180 minutes when applied to a stop.

712

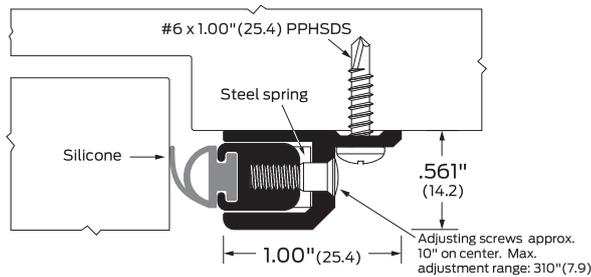


Finishes: AA, BK, D, G Options: S, SEC ANSI/BHMA: 712AA, 712BK, 712D, 712G R3E264



Adjustable and spring loaded. Extruded Bulb/Finger for double-sealing protection.

870

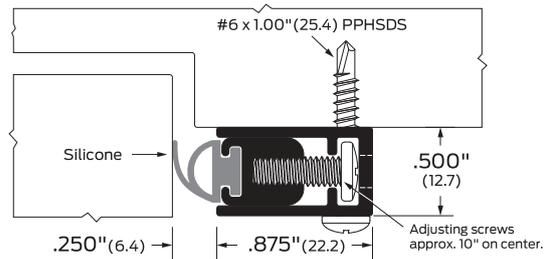


Finishes: AA, BK, D, G Options: S, SEC ANSI/BHMA: 870AA, 870BK, 870D, 870G R3E264



Extruded Bulb/Finger for double-sealing protection.


871

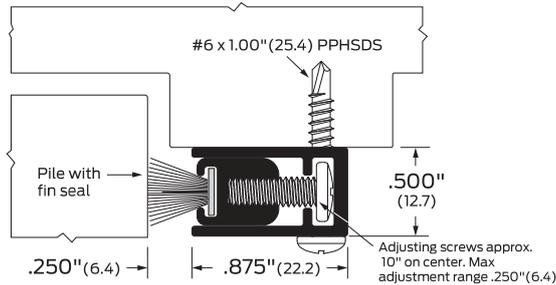

Finishes: AA, BK, D, G Options: S, SEC ANSI/BHMA: 871AA, 871BK, 871D, 871G R3F265



873

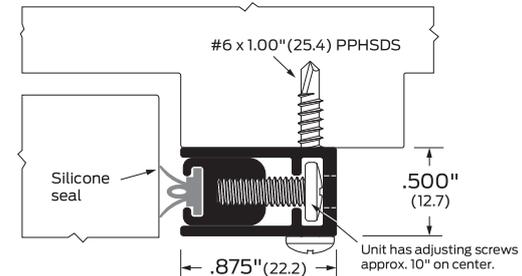

Finishes: AA, BK, D, G Options: SEC



See Perimeter seals Accessories & options page for details.

Finishes:

- A** Aluminum mill finish
- AA** Aluminum clear anodized
- BK** Aluminum black anodized
- D** Aluminum dark bronze anodized
- G** Aluminum gold anodized
- B** Bronze, architectural mill finish
- B-ORB** Oil-rubbed aged bronze

Options:

- FLO** Air flow/ sound block
- PSA** Pressure-sensitive adhesive
- ZAG** Ligature resistant gasketing
- S** Order as a set
- SEC** Security screws

Note:

Finishes: SP = Steel Primed, STST=Stainless Steel.

Verify frame manufacturer is approved to use applied stop.