


Thresholds

Rabbeted thresholds—standard



267

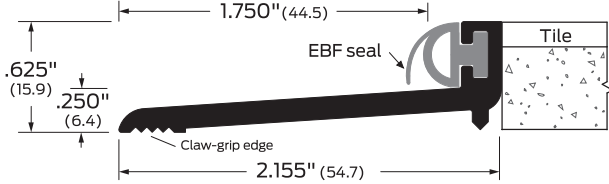

Finishes: A, BK, D, G
Options: E, EL




ANSI/BHMA: 267A, 264D, 267G, 267BK
267A-E, 267D-E, 267G-E, 267BK-E

J36300
J36400

Suitable for uneven floors.
Neoprene extruded bulb/finger for double-sealing protection.

663

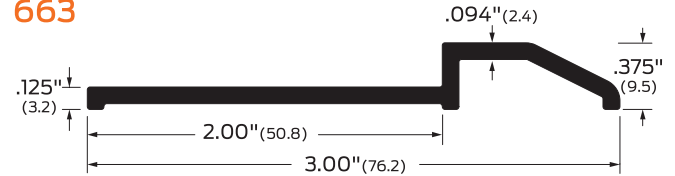

Finishes: A, BK, D, G


Options: E, EL, V3,
EV3, ELV3



ANSI/BHMA: 663A, 663D, 663G, 663BK
J37300, J35300

Rabbeted, butt and transition.
Supplied without mounting holes.

265

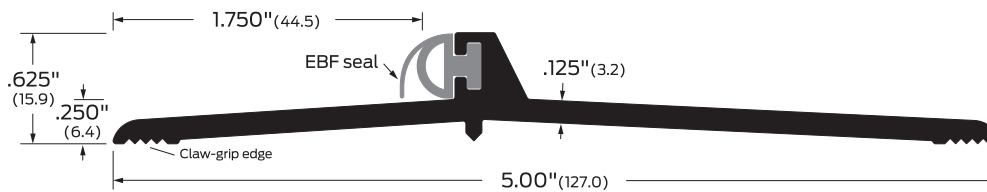

Finishes: A, BK, D, G
Options: E, EL, V3,
EV3, ELV3




ANSI/BHMA: 265A, 265D, 265G, 265BK
265A-E, 265D-E, 265G-E, 265BK-E

J36300
J36400

For latch track hardware.
Neoprene extruded bulb/finger for double-sealing protection.

65

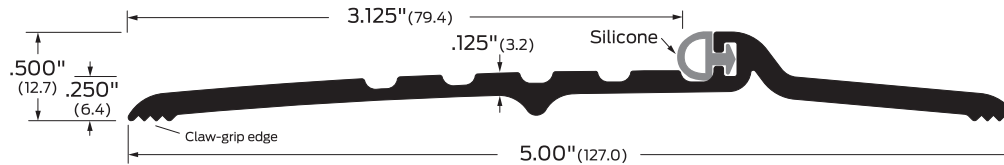

Finishes: A, BK, D, G,
B, B-ORB
Options: E, EL, V3,
EV3, ELV3
(not available
for ORB finish)




ANSI/BHMA: 65A, 65D, 65G, 65BK
65A-E, 65D-E, 65G-E, 65BK-E
65B
65B-E

J36100, J36130
J36200, J36230
J16100, J16130
J16200, J16230

For latch track hardware.

560

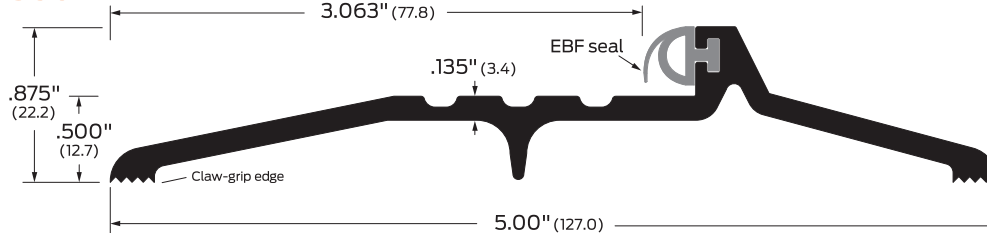


Finishes: A, BK, D, G
Options: E, EL, V3,
EV3, ELV3



ANSI/BHMA: 560A, 560D, 560G, 560BK
560A-E, 560D-E, 560G-E, 560BK-E

J36100
J36200

For latch track hardware.
Neoprene extruded bulb/finger for double-sealing protection.



Specially designed for bottom-latching
exits and locks.

See Thresholds Accessories & options page for details.

Finishes:

A Aluminum mill finish
BK Aluminum black anodized
D Aluminum dark bronze anodized
G Aluminum gold anodized
B Bronze, architectural mill finish
B-ORB Oil-rubbed bronze

Options:

E Epoxy abrasive tread
EL Photoluminescent and abrasive epoxy tread
V3 Full body strength fill
EV3 Epoxy and full body strength fill
ELV3 Photoluminescent and abrasive epoxy tread, full body strength fill

Note:

Special anchors available for mounting most thresholds on concrete surfaces.