


Thresholds

Saddle thresholds



164

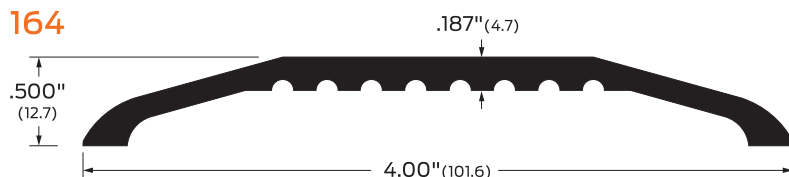

Finishes:
A, BK, D, G



ANSI/BHMA:

164A, 164BK, 164D, 164G


J32300, J32330

164A-E, 164BK-E, 164D-E, 164G-E

J32400, J32430

Model #654 is a recommended alternative if epoxy and/or body strength fills are desired.

164B

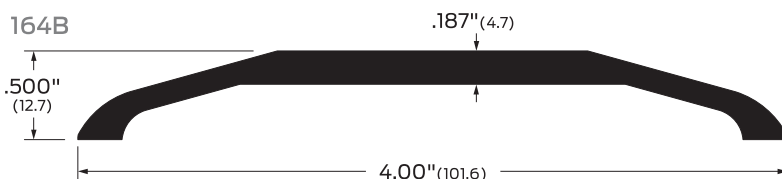

Finishes:
B, B-ORB



ANSI/BHMA:

164B


J12100, J12130

164B-E

J12200, J12230

Model #654 is a recommended alternative if epoxy and/or body strength fills are desired.

655

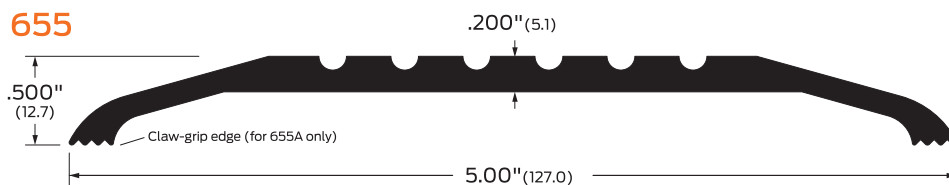

Finishes:
A, BK, D, G,
B, B-ORB

Options:

E, EL, V3,
EV3, ELV3
(not available for B-ORB finish)



ANSI/BHMA:

655A, 655BK, 655D, 655G

J32100, J32130

655A-E, 655BK-E, 655D-E, 655G-E

J32200, J32230


655B

J12100, J12130

655B-E

J12200, J12230

8655

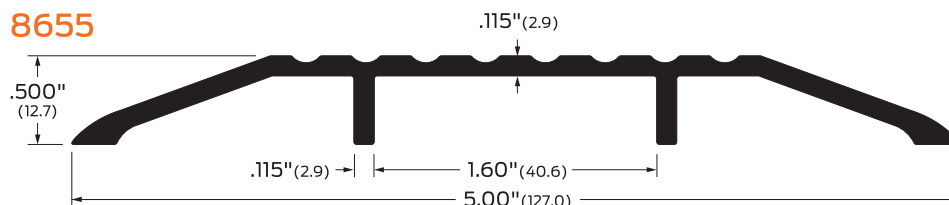

Finishes:
A, BK, D, G

Options:

E, EL, V3,
EV3, ELV3



ANSI/BHMA:


8655A, 8655BK, 8655D, 865G

J32100, J32130

8655A-E, 8655BK-E, 8655D-E, 8655G-E

J32200, J32230

656

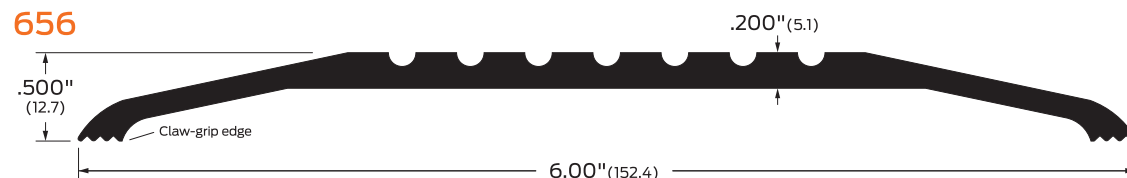

Finishes:
A, BK, D, G,
B, B-ORB

Options:

E, EL, V3,
EV3, ELV3
(not available for B-ORB finish)



ANSI/BHMA:

656A, 656BK, 656D, 656E

J32100, J32130

656A-E, 656BK-E, 656D-E, 656G-E

J32200, J32230

656B

J12100, J12130

656B-E

J12200, J12230

Supplied without mounting holes.



655A-V3 (Full body strength)

See Thresholds Accessories & options page for details.

Finishes:

A Aluminum mill finish
BK Aluminum black anodized
D Aluminum dark bronze anodized
G Aluminum gold anodized
B Bronze, architectural mill finish
B-ORB Oil-rubbed bronze

Options:

E Epoxy abrasive tread
EL Photoluminescent and abrasive epoxy tread
V3 Full body strength fill
EV3 Epoxy and full body strength fill
ELV3 Photoluminescent and abrasive epoxy tread, full body strength fill

Note:

Special anchors available for mounting most thresholds on concrete surfaces.